

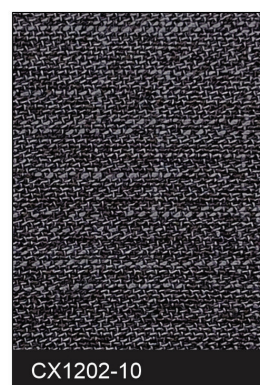
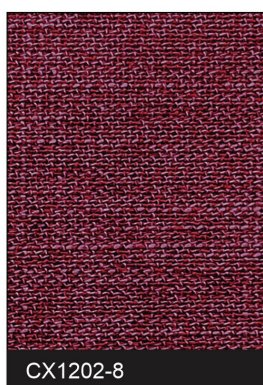
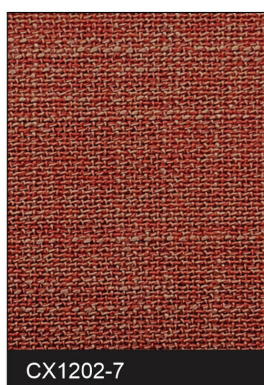
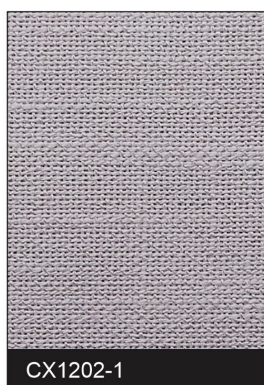



FABRIC - NORDIC

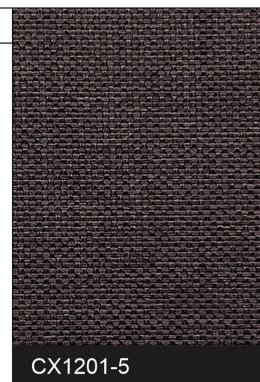


Article Code : CX1201 & CX1202
 Width : 148cm (58")
 Weight : 330g/m²
 Composition : 100% Polyester
 Abrasion Resistance - BS EN ISO 12947 Martindale : >35000
 FR Passes USA NFPA 701-2004
 Water Repellent Effect

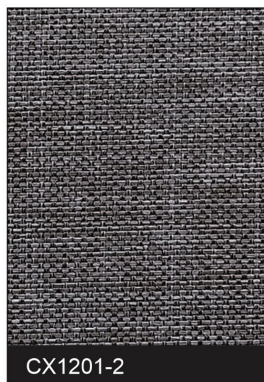


FABRIC - NORDIC 2

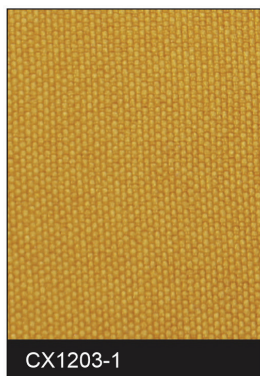


CX1203-1

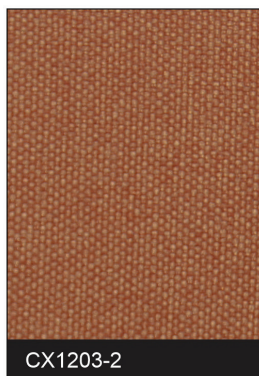


CX1203-2

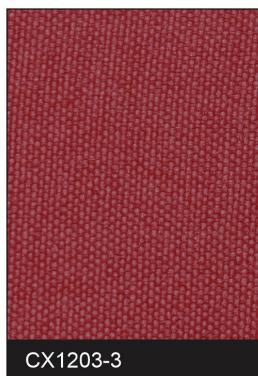


CX1203-3

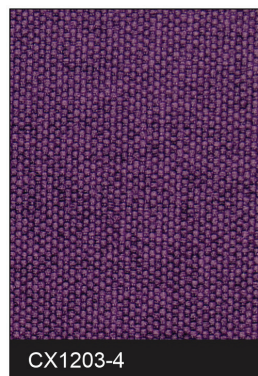

CX1203-4

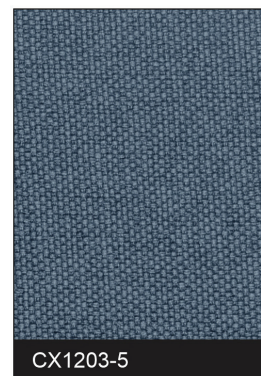


CX1203-5

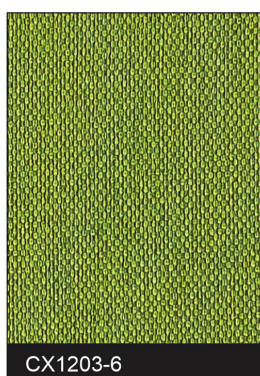


CX1203-6




CX1203-7

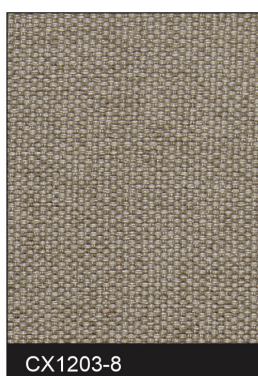


CX1203-8

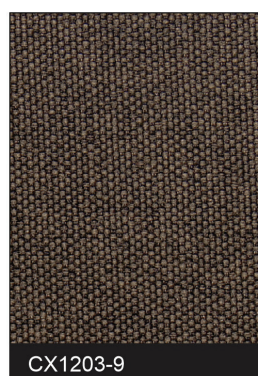


CX1203-9

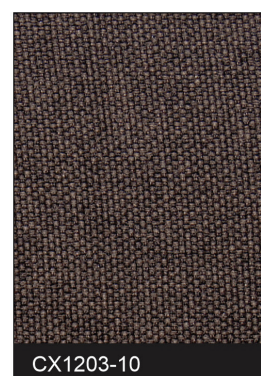


CX1203-10

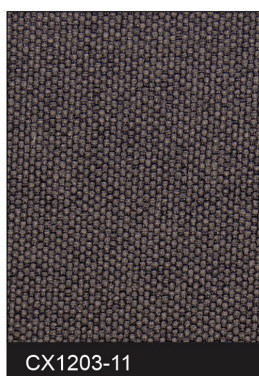

CX1203-11

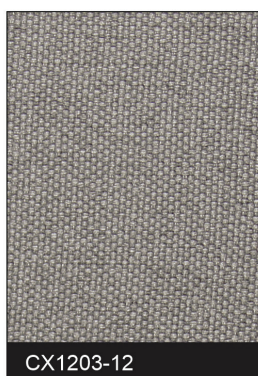

CX1203-12

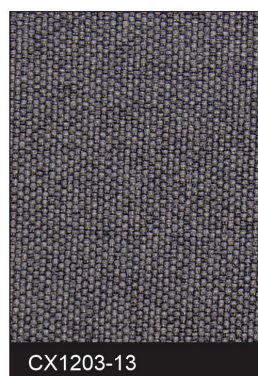

CX1203-13


Article Code : CX1203
Width : 148cm (58")
Weight : 330g/m²
Composition : 100% Polyester
Abrasion Resistance - BS EN ISO 12947 Martindale : >35000
FR Passes USA NFPA 701-2004
Water Repellent Effect



CATEGORY - PU



WT 8304

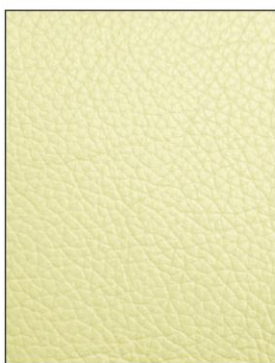

BG 10386



BN 30594



BN 30593



BN 30580



BN 30579



BK 0010



RD 70470

SPECIFICATION

THICKNESS	: 1.05 - 1.20mm	
BREAKING STRENGTH	: L-30kg / In(min)	T-20kg / In(min)
TEAR STRENGTH	: L-3.0kg(min)	T-3.0kg(min)
FLEXIBILITY	: 400,000 cycles	
BOND STRENGTH	: 1.5kg / 2cm(min)	
STRETCH	: L-10-40%	T-100-200%
PERMANENT SET	: L-5%(max)	T-40%(max)
ELONGATION UNDER 14kg LOAD	: 100-180%	
SCRATCH RESISTANCE	: YES	



GY 9440



RD 70579